




Low Profile, Modular Spill Decks Allow You To Design And Create A Containment System That Meets Your Specific Needs

Ultra-Spill Decks are available in 1, 2 and 4-drum modules. Modules are easily connected together with bulkhead fittings to allow a virtually unlimited number of customized configurations.




Bulkhead fittings allow spills to flow to adjacent sump areas, increasing containment capacity while maintaining a low profile.

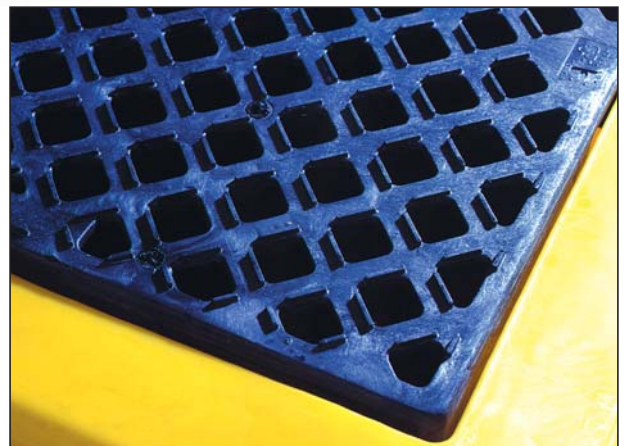

All Ultra-Spill Decks offer slip-resistant grating to reduce OSHA slip hazards.

- Polyethylene construction meets a wide range of chemical compatibility needs.
- Low profile, 5 3/4" height offers safe and convenient loading/unloading of drums.
- Applications include hazardous waste collection, storage of virgin chemicals, drum dispensing and battery storage.
- Optional Loading Ramps provide added drum handling safety and convenience.
- **Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 and UFC Spill Containment Regulations.**

Specifications on next page →

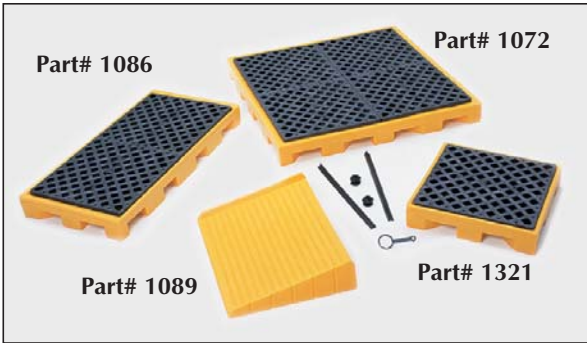

Connect your choice of 1, 2 and 4-drum Spill Deck modules to custom-design your own secondary containment storage pad.



Part# 1090
Polyethylene P6 System

The bulkhead fittings not only “lock” connected modules together, but allow spilled liquid to flow from one module to the next. Ultra-Spill Deck Containment Systems meet SPCC, EPA and Uniform Fire Code Spill Containment Regulations when assembled in configurations of six (6) drums or more.

U.S. Patent No. 5,562,047

ULTRA-SPILL DECKS			
Ultra-Spill Deck P1 Module	Ultra-Spill Deck P2 Module	Ultra-Spill Deck P4 Module	Ultra-Spill Deck Loading Ramp
Part# 1321	Part# 1086	Part# 1072	Part# 1089
Dimensions: 25 7/8" x 25 7/8" x 5 3/4" (657 mm x 657 mm x 146 mm)	Dimensions: 52" x 25 7/8" x 5 3/4" (1,321 mm x 657 mm x 146 mm)	Dimensions: 52" x 52" x 5 3/4" (1,321 mm x 1,321 mm x 146 mm)	Dimensions: 24" x 32" x 5 3/4" (610 mm x 813 mm x 146 mm)
Weight: 23 lbs. (10 kg)	Weight: 40 lbs. (18kg)	Weight: 70 lbs. (32 kg)	Weight: 17 lbs. (8 kg)
Uniformly Distributed Load: 1,500 lbs. (681 kg)	Uniformly Distributed Load: 3,000 lbs. (1,361 kg)	Uniformly Distributed Load: 6,000 lbs. (2,722 kg)	Options: 26" T-Strip, 2 required/long side Bulkhead Fitting, Sidewall Plug
Containment Capacity: 11 gallons (42 L)	Containment Capacity: 22 gallons (83 L)	Containment Capacity: 44 gallons (167 L)	

Ultra Spill Deck P6 and P8®

Available in 6-drum and 8-drum models, Ultra-Spill Decks are perfect for satellite collection of hazardous wastes or storage of virgin chemicals.

- One-piece, molded sump with elevated 2' x 4' black grates.
- Polyethylene grates feature slip resistant, "diamond plate" surface design.
- Deck holds up to 1,500 lbs. per drum UDL (uniformly distributed load).
- Designed for use with Ultra-Spill Deck Loading Ramp (Part# 1089).
- Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 and UFC Spill Containment Regulations.



ULTRA-SPILL DECKS	
Ultra-Spill Deck P6	Ultra-Spill Deck P8
Part# 1175	Part# 1075
Dimensions: 74 1/4" x 50" x 5 1/4" (1,886 mm x 1,270 mm x 133 mm)	Dimensions: 98 1/2" x 50" x 5 1/4" (2,502 mm x 1,270 mm x 133 mm)
Weight: 86 lbs. (39 kg)	Weight: 110 lbs. (50 kg)
Uniformly Distributed Load: 9,000 lbs. (4,082 kg)	Uniformly Distributed Load: 12,000 lbs. (5,443 kg)
Containment Capacity: 66 gallons (250 L)	Containment Capacity: 75 gallons (284 L)